


Description:

Recessed miniature downlight, ideal for recessing or surface mounting in shallow depths. 1Watt CREE XLAMP XP-G3, various colour temperatures and finishes available. Machined solid brass or Machined Aluminium 6061 body, Borosilicate Glass Lens, accessories available. Resin Sealed Cable Gland, Stainless Steel hinge Screws, pre-fitted Double insulated exterior rated cable.

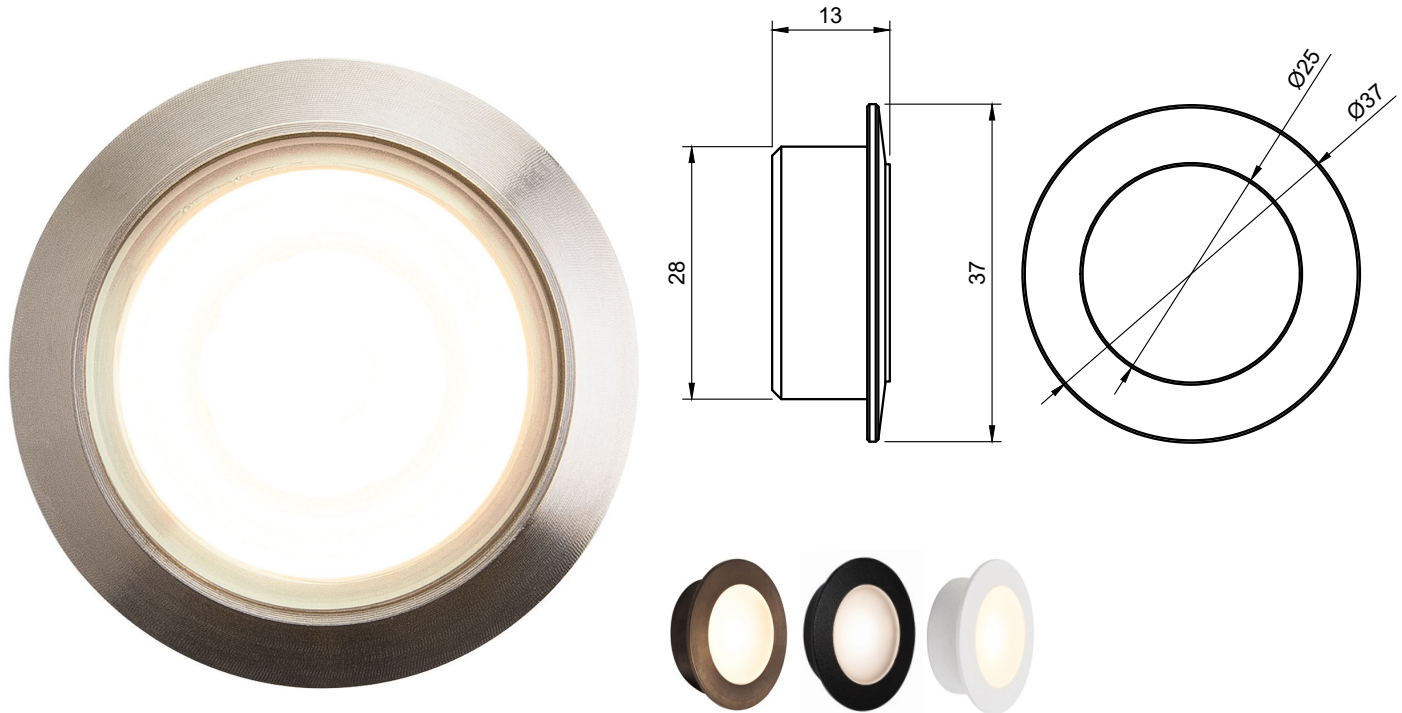

Technical:

| | | | |
|-------------------------------|--------------------------|------------------|-----------------------------------|
| LED TYPE | CREE XLAMP XP-G3 | CONTROL GEAR | REMOTE |
| RATED POWER | 1W | DIMMING PROTOCOL | DALI - 0-10V - PHASE DIM - ON/OFF |
| CRI | 80 | CABLE LENGTH | 500MM STANDARD LENGTH |
| BEAM ANGLES | NOMINATED IN TABLE BELOW | MOUNTING OPTIONS | RECESSED |
| INPUT POWER / FORWARD VOLTAGE | 350mA / 2.73V | WEIGHT | 0.2KG |
| NOMINAL LUMENS | 155lm | HARDWARE | GLASS LENS, O-RING, GLAND, CABLE |
| IP RATING | IP40 | CONSTRUCTION | MACHINED METAL & HEATSINK |
| COLOUR TEMPERATURE | 2700K - 3000K - 4000K | WARRANTY | 2 YEARS |

Product Generator: example 9910CC-AB-D-30-R-1W-DALI

| Model | Finish | Beam Angle | CCT | Mounting | Wattage | Dimming | Accessory |
|----------|--------------------|------------|----------|------------------|------------|---------|-----------|
| NL9910CC | AB Aged Brass | D Diffused | 27 2700K | R Recessed | 1W / 350mA | DALI | N/A |
| | BR Brushed Brass | | 30 3000K | SM Surface Mount | | 0-10V | |
| | SS Stainless Steel | | 40 4000K | | | Phase | |
| | PB Black | | | | | On/Off | |
| | PW White | | | | | | |
| | CC Custom | | | | | | |

| | | | | | | | | | |
|--------|---|---|---|---|---|---|---|---|---|
| NL9910 | - | - | - | - | - | - | - | - | - |
|--------|---|---|---|---|---|---|---|---|---|