


FLEX COVE 16 TUNABLE

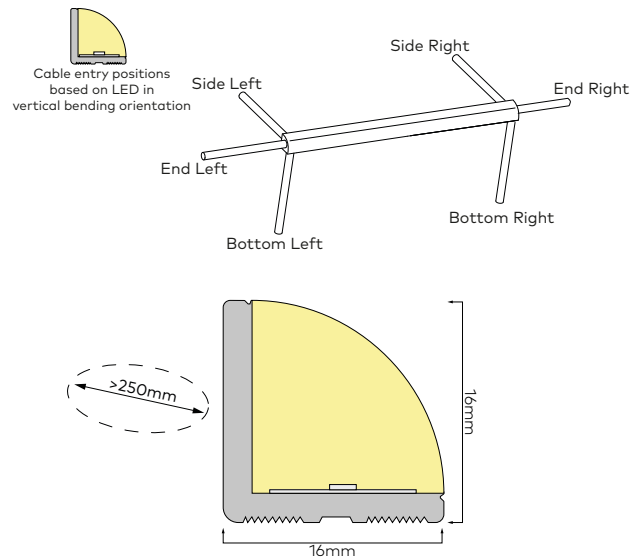

LUMINAIRE SPECIFICATION

Width	16 mm
Height	16 mm
Maximum length	5m
Cut interval	83.3 mm
Minimum bend diameter	>250 mm
Material	White silicone
Mounting	Surface with optional steel clips
IP Rating	IP67
Protection	UV, flame, salt and chlorine resistant
Standards	EN/AS/NZS 60598-2-1, 62031, 62471
Warranty	5 Years

LED SPECIFICATION

LED Wattage	2x9 W/m options Total combined power must not exceed single channel power rating		
CCT	See options table below		
Lumen package	Power 2x9 W/m	2700K 852 lm/m	4000K 962 lm/m
Lifetime (L70)	50,000hrs based on LM-80 & TM-21 applicable test data		
Driver requirement	2 Channel constant voltage		
Voltage	24VDC		

ORDERING INFORMATION

MODEL	JACKET	CRI	CCT		CCT	LED TYPE	CABLE ENTRY		CONNECTOR IP	CABLE LENGTH		LENGTH	
63S16C Neon Flex 16 Cove	1 White	C CRI >90	18	1800K	24	2400K	CT09 2x9 W/m	BL	Bottom Left	7 IP67	003	0.3m	.XXXX Length in mm
			24	2400K	27	2700K		BR	Bottom Right		010	1m	
			27	2700K	30	3000K		EL	End Left		030	3m	
			30	3000K	35	3500K		ER	End Right		050	5m	
			35	3500K	40	4000K		SL	Side Left		100	10m	
			40	4000K	60	6000K		SR	Side Right				
63S16C	1	C				CT09		7					