


FLEX MINI 10x5 VERTICAL DOMED

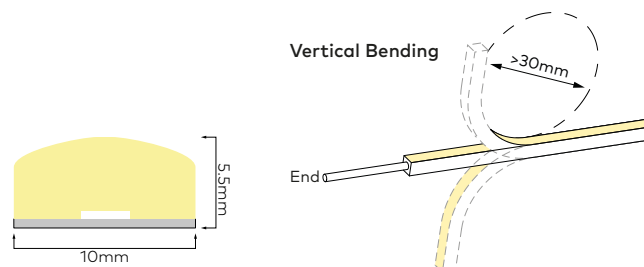

LUMINAIRE SPECIFICATION

Width	10 mm
Height	5 mm
Maximum length	5 W/m : 7 m 9 W/m : 4 m 14 W/m : 3 m
Cut interval	50 mm
Minimum bend diameter	>30 mm
Material	White silicone
Mounting	Surface
IP Rating	IP67
Protection	UV, flame, salt and chlorine resistant
Standards	EN/AS/NZS 60598-2-1, 62031, 62471
Warranty	5 Years

LED SPECIFICATION

LED Wattage	5 W/m - 14 W/m			
CCT	See options table below			
CRI	>90Ra			
Lumen package (3000K)	5 W/m	2700K 531 lm	3000K 564 lm	4000K 593 lm
	9 W/m	996 lm	1053 lm	1110 lm
	14 W/m	1442 lm	1518 lm	1593 lm
Binning	3 Step			
Lifetime (L70)	50,000hrs based on LM-80 & TM-21 applicable test data			
Driver requirement	Constant voltage			
Voltage	24 VDC			

ORDERING INFORMATION

MODEL	JACKET	CRI	CCT	LED TYPE	CABLE ENTRY	CONNECTOR IP	CABLE LENGTH	LENGTH
63S1005VD Neon Flex 10x5 Vertical DomEd	1 White	C CRI >90	18 1800K 24 2400K 27 2700K 30 3000K 35 3500K 40 4000K 60 6000K	S05 5 W/m S09 9 W/m S14 14 W/m	E End	7 IP67	003 0.3m 010 1m 030 3m 050 5m 100 10m	.XXXX Length in mm
63S1005VD	1	C			E	7		